Q.raxx X 19" AC

3HU Case for Q.raxx XE/XL Modules

Q.raxx X is an new addition to the Q.series product family - the ideal 19" rackmount solution for applications that require high channel density and custom sensor terminations.

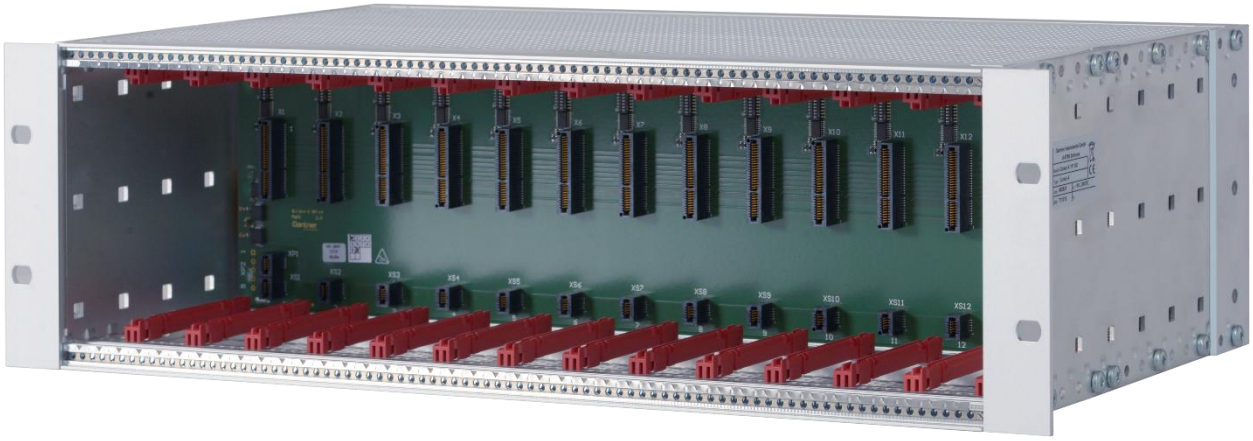

Features:

Power Supply

Supply voltage	110 V - 240 VAC to 24 VDC switching power supply
Power consumption	10 W Q.raxx X station (if slotted in) + appox. 2 W per slotted Module
Supply connector	Connector on the Back of the Rack
	AC Input on rear with standard ICE socket (Type C14)

Slots

Total amount	14
Controller Modules	If a Controller is necessary, it needs to be placed in the first (far left) slot

Housing (19" Rack)

Width	84 HP
Height	3 U
Depth	235 mm
Kind	Desktop or rack mounting

Environmental

Operating Temperature	-20 °C to +60 °C
Storage Temperature	-40 °C to +85 °C
Relative Humidity	5 % to 95 % at 50 °C, non-condensing

Gantner Instruments GmbH
Montafonerstr. 4 · A-6780 Schruns · Tel. +43 (0) 5556 · 77463-0
info@gantner-instruments.com
www.gantner-instruments.com

Q.raxx X 19" AC

3HU Case for Q.raxx XE/XL Modules

Backside pin assignment

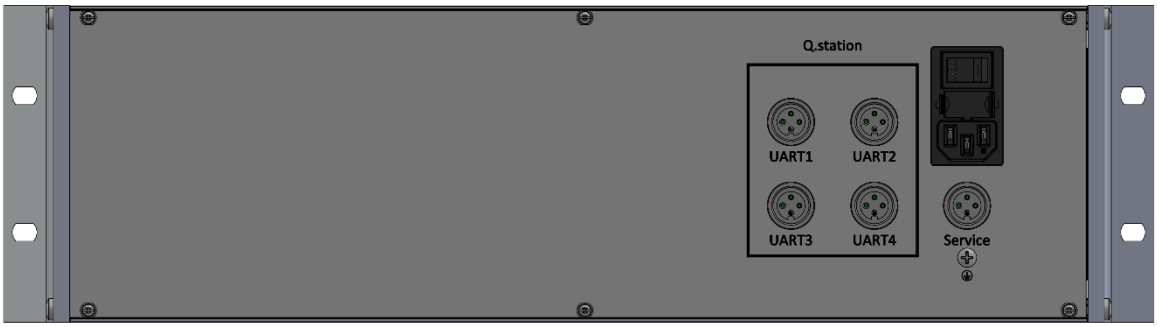

1	UART A
2	-
3	UART B



Ordering Information

Article number	563830

Gantner Instruments GmbH
Montafonerstr. 4 · A-6780 Schruns · Tel. +43 (0) 5556 · 77463-0

info@gantner-instruments.com
www.gantner-instruments.com