Measuring amplifier GSV-61T6 SubD44HD

Item number: 16817



Highlights

- 6 channels for connecting force-torque sensors
- USB interface for configuration and commissioning with GSVmulti
- 1kHz data frequency
- flange housing 104mm x 84mm x 35mm

ME-Meßsysteme GmbH
Eduard-Maurer-Str. 9
DE-16761 Hennigsdorf

Tel: +49 (0)3302 8982 4 10
Mail: vertrieb@me-systeme.de
Web: www.me-systeme.de

Stand: 21.03.2026

Technical Drawing

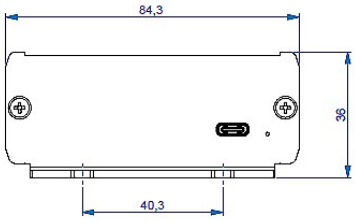

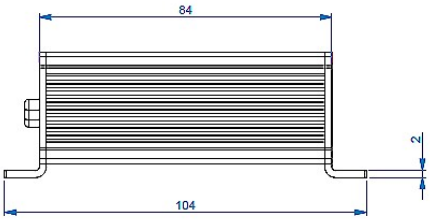

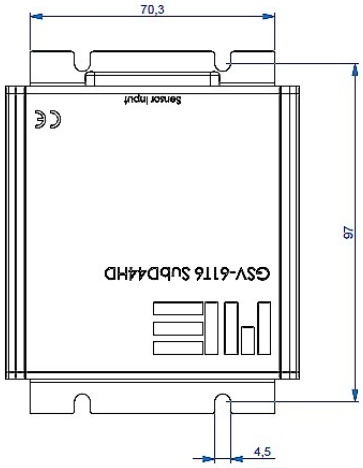



ME-Meßsysteme GmbH
Eduard-Maurer-Str. 9
DE-16761 Hennigsdorf

Tel: +49 (0)3302 8982 4 10
Mail: vertrieb@me-systeme.de
Web: www.me-systeme.de

Stand: 21.03.2026

Technical Data

Basic Data		Unit
Dimensions	104mm x 84mm x 35mm	
Housing	Aluminium	
Connection	Plug connector	
Number of channels	6-channel	
Interface	USB	

Input analog		Unit
Number of analog inputs	6	
Input sensitivity-steps	2.0	mV/V
Strain-gauge-full-bridge resistance from	120	Ohm
Strain-gauge-full-bridge resistance to	5000	Ohm

Output analog	Unit

Accuracy data		Unit
Accuracy class	0,05%	
Relative linearity error	0.02	%
Temperature effect on the zero point	0.01	%
Temperature effect on the measuring sensitivity	0.01	%
Resolution	24	bit

Measuring frequency		Unit
Data frequency from	0	Hz
Data frequency to	1000	Hz

ME-Meßsysteme GmbH
Eduard-Maurer-Str. 9
DE-16761 Hennigsdorf

Tel: +49 (0)3302 8982 4 10
Mail: vertrieb@me-systeme.de
Web: www.me-systeme.de

Stand: 21.03.2026

Supply		Unit
Supply voltage from	18	V
Supply voltage to	28	V
Current consumption from	100	mA
Current consumption to	200	mA

Interface		Unit
Type of the interface	USB	

Environmental Data		Unit
Rated temperature range from	0	°C
Rated temperature range to	50	°C
Operating temperature range from	-20	°C
Operating temperature range to	65	°C
Environmental protection	IP50	

ME-Meßsysteme GmbH
Eduard-Maurer-Str. 9
DE-16761 Hennigsdorf

Tel: +49 (0)3302 8982 4 10
Mail: vertrieb@me-systeme.de
Web: www.me-systeme.de

Stand: 21.03.2026