



XL403A

SPECIFICATIONS

±1 g to ±15 g Rugged Uniaxial, Biaxial, or Triaxial Accelerometer for Quick Shipment

Get Started on Simplified Acceleration and Temperature Measurements

The Measurement Specialties **XL403A** is ready when you are. In stock and ready to ship, you can be taking measurements in less time than with built-to-order accelerometers.

The small size and built-in power regulation allow the XL403A to fit where other accelerometers can't. Choose bandwidth up to 800 Hz and range options of ±1 g to ±15 g to measure accelerations on one, two or three axes.

Tested over the -40 to +85°C temperature range, the accelerometers have a nominal full scale output swing of ±2 Volts. The zero g output level is nominally +2.5 Volts. Precise values are available on the included calibration certificate.

FEATURES AND BENEFITS

High Accuracy and Linearity over Wide Temperature Range

The voltage output for the XL403A is directly proportional to the acceleration along the axis. Each DC-coupled output is fully scaled, referenced, and temperature compensated. Accuracy is improved by minimizing variations due to temperature and aging effects, resulting in sensors that are more stable over temperature than piezoelectric or piezoresistive devices.

Calibration Certificate

Each XL403A is supplied with a calibration certificate listing sensitivity and offset, as well as the on-axis and transverse alignment parameters needed to ensure rapid and efficient system implementation. The alignment data can be used to compensate the measured values if needed.

Self-Test on Digital Command

A TTL-compatible self-test input causes a simulated acceleration to be injected into the accelerometer to verify channel integrity.

Small Size

Complete conditioned uniaxial, biaxial, or triaxial accelerometer in less than a cubic inch.

-Built-In Power Supply Regulation

Unregulated DC power from +8.5 to +36 Volts is all that is required to measure acceleration and temperature. Reverse power voltages of up to -80 V can be withstood indefinitely. Transients of +80 V for 550 ms compatible with MIL-STD-704A can be withstood with full operation.

Easy Installation

Integrated cable with 9-pin connector makes it easy to wire. Two through-holes and four tapped holes simplify mounting.

-Suitable for Harsh Environments

The XL403A is robust and can be used in harsh environments. The unit will survive 5000 g powered or unpowered.

Earth Friendly Design

Lead-free design makes the XL403A environmentally safe while Measurement Specialties' assembly process ensures reliable functionality. Fully potted electronics eliminates the possibility of tin whiskers-related failures.

Warranty

These Measurement Specialties accelerometers come with a three-year factory warranty.


SPECIFICATIONS - *improved specifications available upon request*

Ta = Tmin to Tmax; 8.5 ≤ Vs ≤ 36 V; Acceleration = 0 g unless otherwise noted; within one year of calibration.

Parameter	Min	Typical	Max	Units	Conditions/Notes
Range					
Measurement Full Scale	±1		±15	g	On each axis. Must specify via Option Rnnn
Sensitivity					
At 25°C, Option R005		400 [†]		mV/g	Precise values on cal certificate
Drift T _{min} to T _{max}		±0.65	±3	%	Percent of sensitivity at 25°C
Zero g Bias Level					
At 25°C		2.50 ±0.010		V	Precise values on cal certificate
Drift T _{min} to T _{max}		20		mg	At 1.25°C/min. temperature rate of change
Alignment					
Deviation from Ideal Axes		±1.0	±3.0	degrees	Precise values on cal certificate Can be compensated if required
Transverse Sensitivity					
		±0.25		%	Inherent sensor error, excluding misalignment
Nonlinearity					
		0.1	0.5	% FSR	Best fit straight line
Frequency Response, 5-pole					
	0		800	Hz	Upper cutoff per Option Bnnn, -3dB pt ±10%, 5-pole Butterworth filter
Noise Density					
		100		µg/√Hz	10 Hz to 400 Hz
Self-Test Pull-up Resistor					
	5			kΩ	Logic "1" ≥ 3.5 V, Logic "0" ≤ 1.5 V, "0" causes self-test
Temperature Sensor					
Sensitivity		6.45		mV/°C	Accuracy ±1°C
0°C Bias Level		509		mV	
Outputs					
Output Voltage Swing	0.50		4.50	V	I _{out} = ±0.5 mA
Capacitive Drive Capability		1000		pF	
Power Supply (Vs)					
Input Voltage Limits	-80		+80	V	-80 V continuous, >38 V if ≤550 ms, duty <1%
Input Voltage - Operating	+8.5		+36	V	Continuous
Input Current		12		mA	
Rejection Ratio		>120		dB	DC
Temperature Range (Ta)					
	-40		+85	°C	
Mass					
		38		grams	Precise values on cal certificate
Shock Survival					
	-5000		+5000	g	Any axis for 0.5 ms, powered or unpowered


[†] Scale linearly with range option Rnnn; see Ordering Information

MECHANICAL

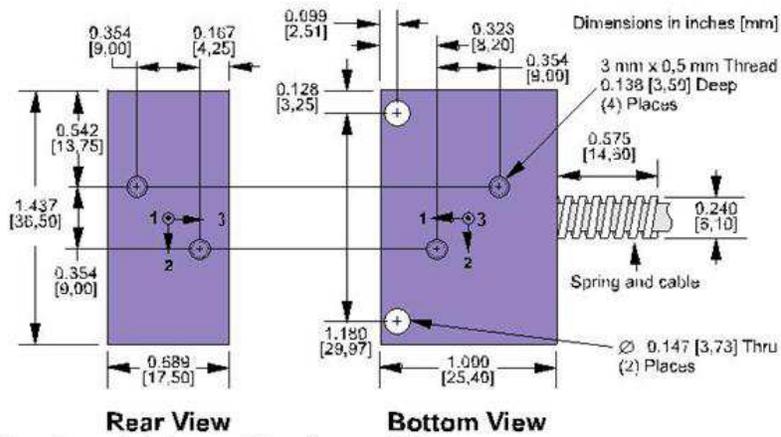


Two through holes and four 3 mm x 0.5 mm threaded holes are provided for mounting.

Mounting adapters (sold separately)




35173A Horizontal



35172A Vertical


CONNECTIONS

T004 Male D-Shell Connector

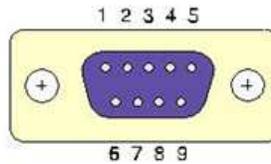

Pin	1	2	3	4	5	6	7	8	9
Signal	Analog1+	Analog2+	Analog3+	Signal -	Reserved	Reserved	Self Test	+Vs	Gnd
Wire	Brown	Red	Orange	Yellow	Green	Blue	Violet	Grey	White

ORDERING INFORMATION

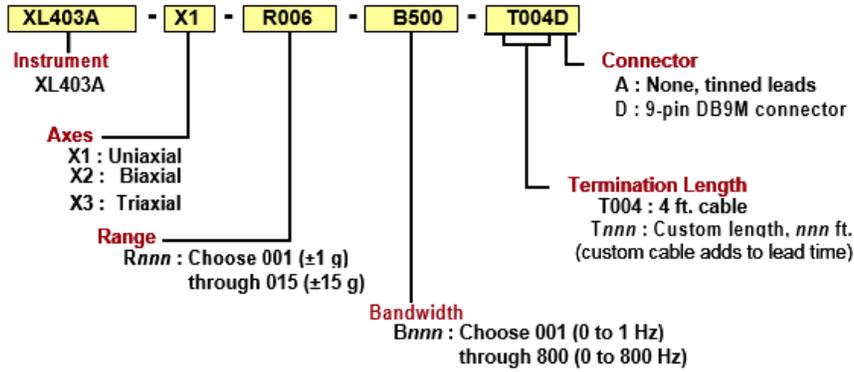

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Tel: 800-522-6752
Email: customercare.hmpt@te.com

EUROPE

MEAS France SAS
a TE Connectivity Company
Tel: 800-440-5100
Email: customercare.lcsb@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Tel: 0400-820-6015
Email: customercare.shzn@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.